

Model CA

Cascading Safety Light Curtains

Pricing/Ordering Procedure

Ordering/Pricing Procedure for Pylons

CA	Set 1	Set 2	Set 3	Set 1	Set 2	Set 3	Light Curtain Style or Blanking*	Scanning Distance In Feet
	Pylon Guarded Zone in inches			Beam Spacing Options				
Cascading System	4" (102mm) to 120" (3,048mm) in 4" (102mm) increments			.5" (13mm) 1" (25mm) 4" (100mm)			OF 1F 8K AB	20' (6.1m) standard, 50' (10.7m) maximum

*Light Curtain Style or Blanking Description

- OF** - Constant scan - no blanking
- 1F** - 1 beam floating blank built-in.
- 8K** - Up to 3 beam floating blank adjustable by the use of a supervisory keyswitch removable in all positions. Capable of constant scan or one, two or three floating beams. (Requires RSD option)
- AB** - Includes constant scan light curtain, one beam floating blank and two auto blank modes. (Requires RSD option)

If modifications are needed, please consult factory.


Options

- SMB** - **Swivel Mounting Brackets for Pylons:** Replaces the fixed mounting brackets normally supplied. Provides a 360° rotation of pylons.
- PT** - **Polycarbonate tube** which will encase the pylons for high impact protection.

Ordering/Pricing Procedure for Cables

CAB	21	Set 1 to Set 2	Set 2 to Set 3
Cascading System Cables	21' (6.3m) Supplied Standard		
	Input power (24VDC) and Safety Output Cable with Connector	Interconnecting Cables with Connector	
	200' Maximum Length	Max 6' (1.8m) between sets 24' (7.3m) max cumulative interconnect length in system.	

Please note that both the Pylons and Cables part numbers must be submitted to complete the order.

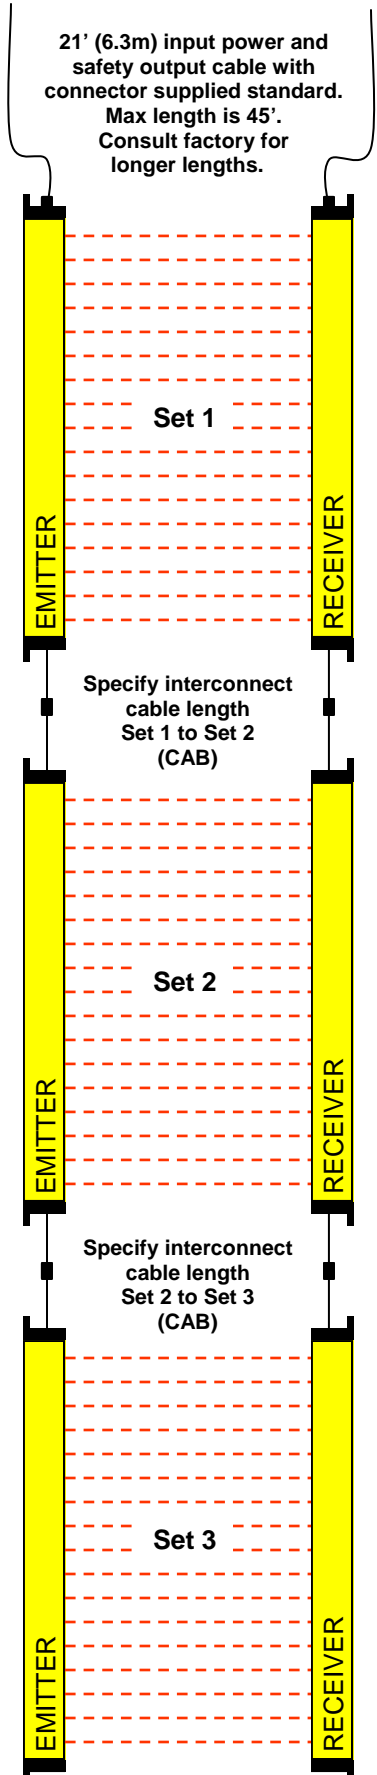

- Pylons can be hard wired together with no connectors if required (consult factory).
- Maximum of 128 beams per system (cumulative).
- Consult factory for larger beam systems or additional segments if needed.