


# Microguard SS, CA, CE (OPTIONAL) Cincinnati Interface

CINN In:  
Microguard Safety Outputs will  
OPEN when 5-24VDC applied  
across Terminal 15-16

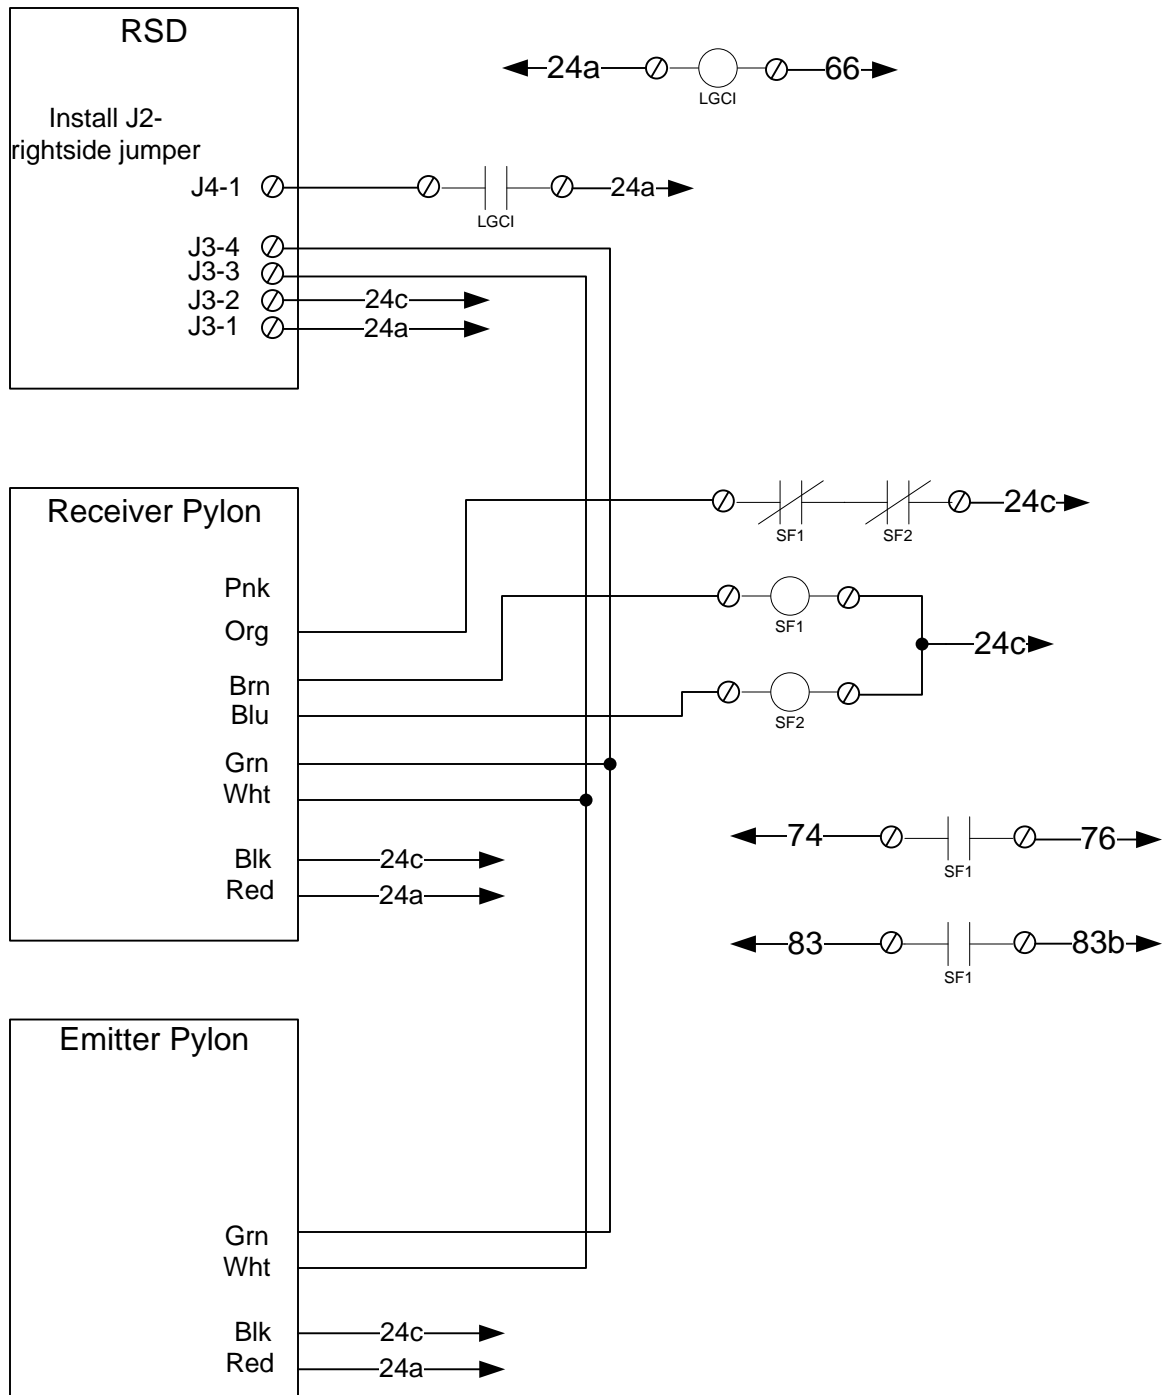

This configuration assumes that the "Light Guard Check" input is 24vdc and Grounds to force the Light Guard to OPEN its Safety Outputs.